



**Card Reader/Writer** 




ICS

## **Features**

- Default IC (Mifare) card(-D means ID card,125KHz), DESFIRE EV1
- No driver installation, plug and play
- USB power supply and communication
- Beep and indicator



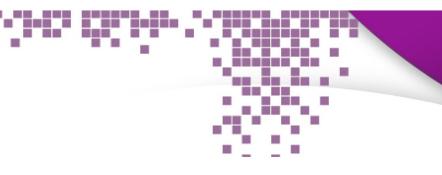



## AD-ASM100/AD-ASM100-D

## **Card Reader/Writer**

## **Specifications**

Model	AD-ASM100/AD-ASM100-D
System	
Main Processor	32 Bit
Read	
Read Format	13.56MHz(Mifare)/125KHz("-D" EM, Optional)
Read Distance	>3cm
Interface	
Communication	USB
General	
Beep Tone	Buzzer
Power Supply	5VDC/100mA
Working Environment	-30°C-+60°C
Working Humidity	≤95%
Dimension(W×D×H)	105mm*75mm*20mm
Weight	0.18Kg

