


AD-ASR1101A

RFID READER

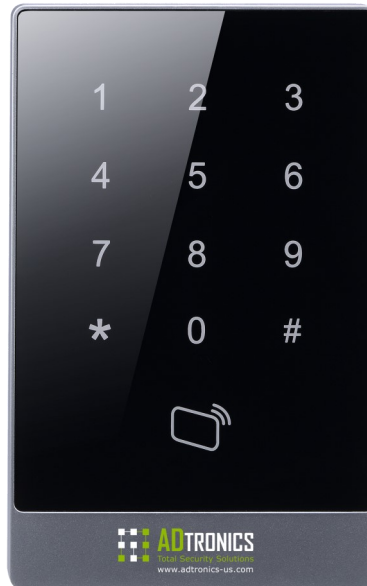

Features

- Wiegand26/34 bits RS-485 protocol
- 13.56MHz(Mifare)
- 125KHz(EM-ID)
- Red and Green LEDs
- Sensitive touch keypad with blue backlight
- Watch dog function ensure device free from halting
- Beep Buzzer and LED indicator
- Surface mounted installation

AD-ASR1101A

RFID READER

Technical Specification				
Mode	ASR1101A	ASR1001A	ASR1101A-D	ASR1001A-D
System				
Main Processor	8 Bit			
Read				
Read Format	13.56MHz	13.56MHz	125KHz	125KHz
Read Range	6-8cm (max.)			
Reading time	<0.1s			
Function				
Tamper Alarm	Yes			
Interface				
To Controller	RS485	Wiegand26/34	RS485	Wiegand26/34
General				
Keypad	12Keys(0-9,*,#)			
Sensitive touch keypad	Blue backlight			
Beep Tone	Buzzer			
Ingress protection	IP55			
Power Supply	9-15VDC/100mA			
Working Environment	-30°C~+60°C			
Working Humidity	≤95%			
Dimension (W×D×H)	135mm*86mm*12mm			
Weight	0.25Kg			