


AD-CC6AF-L-C Cat.6A FTP Patch Cable (Molding type optional)

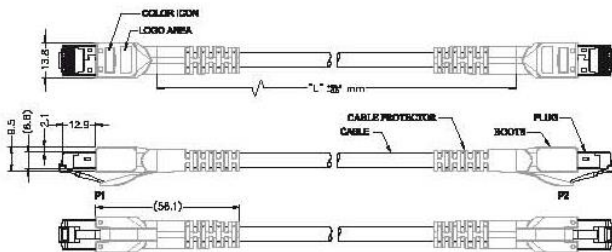

Specification:

Qualified Screened Cat.6A/Class EA (10G/500MHz) Connecting Hardware

Complied with IEC 60603-7-5 2nd Edition

ISO/IEC 11801 2.2 Edition

CENELEC EN 50173-1:2011

ANSI/TIA-568-C.2

The cords are by design fully Alien Crosstalk compliant, so no special installation rules need to be taken into account for ANEXT and AFEXT compliance.

Physicals:

Housing: PC, 94V-0

Loadbar: PC, 94V-0

Organizer: Zinc alloy, nickel plated.

Contact Blade: 2-contact blade for stranded wire, phosphor bronze, gold over nickel plating

Shielded: Brass, nickel plating

Boots: PC, 94V-0

Cable Protector: RoHS PVC

Color Icon: PBT, 94V-0

Cable: Cat.6A FTP LSZH cable 4 pairs, 26AWG, stranded, OD Ø5.80mm, 8 Copper Conductor Ø0,51mm



References	Length	CoLor
AD-CC6AF-L-C	L=1, For a length of 1 m	C=G, For Grey
	L=2, For a length of 2 m	C=B, For blue
	L=3, For a length of 3 m	C=R, For Red
	L=5, For a length of 5 m	C=V, For Green
	L=7, For a length of 7 m	C=J, For yellow
	L=N, For Black	C=N, For Black