

ADTRONICS® AD-CC6AS-L-C-V2


Patch Cord Cat.6A S/FTP, ISO, LSFRZH, AWG 26/7, 500MHz

Specification

Qualified Screened Cat.6A/Class EA (10G/500MHz) Connecting Hardware
 Complied with IEC 60603-7-51 2nd Edition
 IEC 60754-1, IEC 60332-3C, IEC 61034, ISO/IEC 11801:2011,
 ANSI/TIA/EIA-568.2-D, 568-C.2, 568-2-1
 CENELEC EN 50173-1:2011 ,DIN EN 50173-1:2018
 10G BASE-T IEEE 802.3TM

Physicals

Housing: PC, 94V-0
 Loadbar: PC, 94V-0
 Organizer: Zinc alloy, nickel plated.
 Contact Blade: 2-contact blade for stranded wire, phosphor bronze, gold over nickel plating
 Shielded: Brass, nickel plating, With unlocking sleeve
 Boots: PC, 94V-0
 Cable Protector: RoHS 2 PVC
 Color Icon: PBT, 94V-0
 Cable: Cat.6A S/FTP LSFRZH cable 4 pairs, 26AWG/7, stranded, Original factory
 Protection class IP: IP 20
 with RJ45 cat.6a S/FTP connectors with sleeves at both ends
 Includes 4 twisted pairs made of copper wires

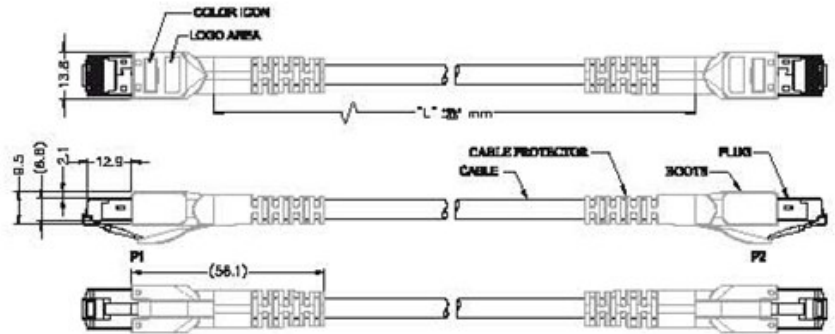

References	Length	CoLoR
AD-CC6AS-L-C-V2	L=0,5 For a length of 0,5m	C=G, For Grey
	L=1 & 1,5 For a length of 1m & 1,5m	C=B, For blue
	L=2 & 2,5 For a length of 2m & 2,5m	C=R, For Red
	L=3 & 3,5 For a length of 3m & 3,5m	C=V, For Green
	L=5 & 5,5 For a length of 5m & 5,5m	C=J, For yellow
	L=7 & 7,5 For a length of 7m & 7,5m	C=W, For White
	L=N, other length on request	