


AD-CC6AU-L-C Cat.6A UTP Patch Cable (Molding type optional)

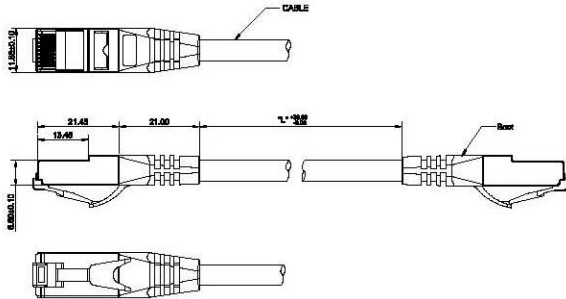

Specification:

Qualified Unscreened Cat.6A/Class EA (10G/500MHz) Connecting Hardware
 Complied with IEC 60603-7-41
 ISO/IEC 11801 2.2 Edition
 CENELEC EN 50173-1:2011
 ANSI/TIA-568-C.2

Physicals:

Housing: PC, 94V-0
 Loadbar: PC, 94V-0
 Organizer: Metalized compound.
 Contact Blade: 2-contact blade for stranded wire, phosphor bronze, gold over nickel plating
 Boots: PP
 Cable: Cat.6A U/UTP LSZH patch cable 4 pairs, 24AWG, stranded, OD Ø5.90mm.



References	Length	CoLor
AD-CC6AU-L-C	L=1, For a length of 1 m	C=G, For Grey
	L=2, For a length of 2 m	C=B, For blue
	L=3, For a length of 3 m	C=R, For Red
	L=5, For a length of 5 m	C=V, For Green
	L=7, For a length of 7 m	C=J, For yellow
	L=N, For Black	C=N, For Black

