


ADTRONICS® AD-CC6F-L-C

ADTRONICS AD-CC6F-L-C Cat.6 F/UTP Component LSZH Patch Cord (Molding type optional)

Specification:

Qualified Screened Cat.6/Class E Connecting Hardware
 Complied with IEC 60603-7-5 2nd Edition
 ISO/IEC 11801 2.2 Edition
 Impedance : 100 Ohms.
 CENELEC EN 50173-1:2011
 TIA/EIA-568-B.2-1
 IEEE 802.3an

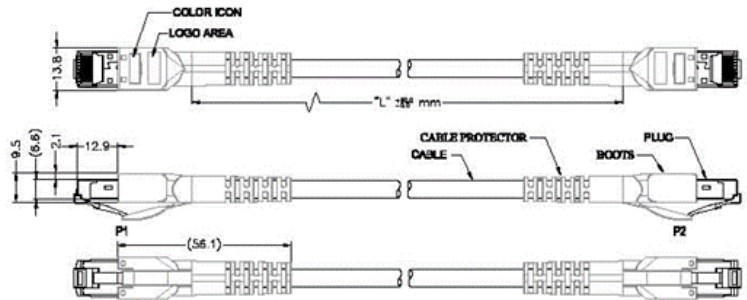

Physicals:

Housing: PC, 94V-0
 Loadbar: PC, 94V-0
 Organizer: Metalized compound
 Contact Blade: 2-contact blade for stranded wire, phosphor bronze, gold over nickel plating
 Shielded: Brass nickel plating
 Boots: PC, 94V-0
 Cable Protector: RoHS PVC
 Color Icon: PBT, 94V-0
 Cable: Cat.6 FTP LSZH patch cable 4 pairs, 26AWG, stranded, OD Ø5.80mm.



References	Length	CoLor
AD-CC6F-L-C	L=1, For a length of 1 m	C=G, For Grey
	L=2, For a length of 2 m	C=B, For blue
	L=3, For a length of 3 m	C=R, For Red
	L=5, For a length of 5 m	C=V, For Green
	L=7, For a length of 7 m	C=J, For yellow
	L=N, For others on demand	C=N, For Black