

ADTRONICS® AD-CC6U-L-C

ADTRONICS AD-CC6U-L-C Cat.6 UTP Component LSZH Patch Cord (Molding type optional)

Specification:

Qualified Unscreened Cat.6/Class E Connecting Hardware

Complied with IEC 60603-7-4 2nd Edition

ISO/IEC 11801 2.2 Edition

CENELEC EN 50173-1:2011

ANSI/TIA-568-C.2

IEEE 802.3an

Physicals:

Housing: PC, 94V-0


Loadbar: PC, 94V-0

Organizer: Metalized compound.

Contact Blade: 2-contact blade for stranded wire, phosphor bronze, gold over nickel plating

Boots: PP

Cable: Cat.6 U/UTP LSZH patch cable 4 pairs, 24AWG, stranded, OD Ø5.90mm.

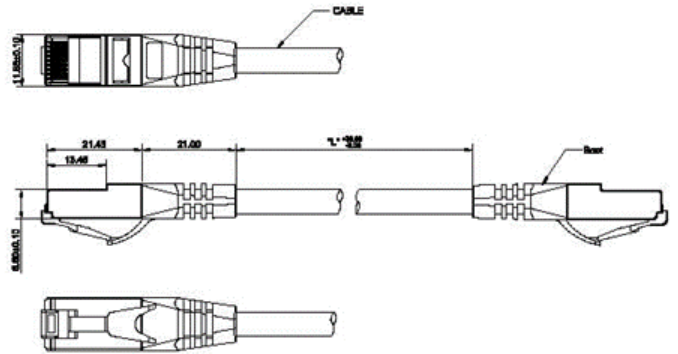

References	Length	CoLor
AD-CC6U-L-C	L=1, For a length of 1 m	C=G, For Grey
	L=2, For a length of 2 m	C=B, For blue
	L=3, For a length of 3 m	C=R, For Red
	L=5, For a length of 5 m	C=V, For Green
	L=7, For a length of 7 m	C=J, For yellow
	L=N, For others on demand	C=N, For Black

