

# ADTRONICS® AD-CC6AS-L-C



## Cat.6A STP Patch Cord (Molding type optional)

### Specification

Qualified Screened Cat.6A/Class EA (10G/500MHz) Connecting Hardware  
 Complied with IEC 60603-7-5 2nd Edition  
 ISO/IEC 1180:2011 ANSI/TIA/EIA-568.2-D  
 CENELEC EN 50173-1:2011  
 ANSI/TIA-568-C.2

### Physicals

Housing: PC, 94V-0  
 Loadbar: PC, 94V-0  
 Organizer: Zinc alloy, nickel plated.  
 Contact Blade: 2-contact blade for stranded wire, phosphor bronze, gold over nickel plating  
 Shielded: Brass, nickel plating, With unlocking sleeve  
 Boots: PC, 94V-0  
 Cable Protector: RoHS PVC  
 Color Icon: PBT, 94V-0  
 Cable: Cat.6A S/FTP LSZH cable 4 pairs, 26AWG, stranded,

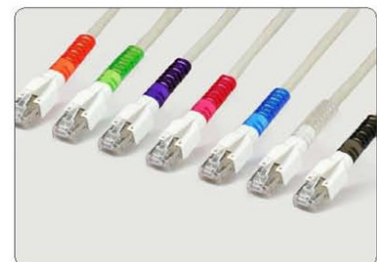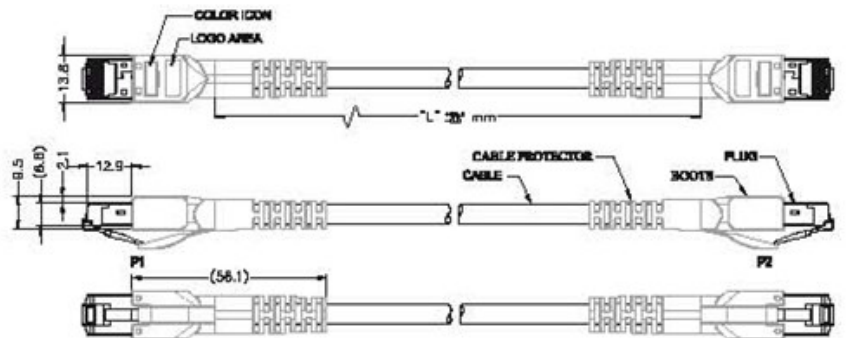

References	Length	CoLor
AD-CC6AS-L-C	L=1, For a length of 1 m	C=G, For Grey
	L=2, For a length of 2 m	C=B, For blue
	L=3, For a length of 3 m	C=R, For Red
	L=5, For a length of 5 m	C=V, For Green
	L=7, For a length of 7 m	C=J, For yellow
	L=N, other length on request	C=W, For White