

## RJ SECURE PATCH CORD

### AD-CCLC6F-L-C Cat.6 FTP Component LSZH RJ Secure Patch Cord (Molding type optional)

Qualified The RJ Secure Patch Cord features a low-profile boot with an integrated lock that prevents normal disconnection.

The cord can only be removed with the use of the RJ Secure universal key\*. The unique plug and boot design incorporates a push-pull action which is based on Adtronics. This design provides excellent accessibility in high density environments.


The RJ Secure Patch Cord is offered in Category 6A F/UTP, UTP, and Category 6 UTP versions and is fully supported by Applicable Adtronics System Warranties.

#### Specification:

Qualified Screened Cat.6/Class E Connecting Hardware  
 Complied with IEC 60603-7-5 2nd Edition  
 ISO/IEC 11801 2.2 Edition  
 CENELEC EN 50173-1:2011  
 ANSI/TIA-568-C.2

#### Physicals:

Housing: PC, 94V-0  
 Loadbar: PC, 94V-0  
 Organizer: Metalized compound  
 Contact Blade: 2-contact blade for stranded wire, phosphor bronze, gold over nickel plating  
 Shielded: Brass nickel plating  
 Boots: PC, 94V-0  
 Cable Protector: RoHS PVC  
 Color Icon: PBT, 94V-0  
 Cable: Cat.6 S/FTP LSZH patch cable 4 pairs, 26AWG, stranded, OD Ø5.80mm.

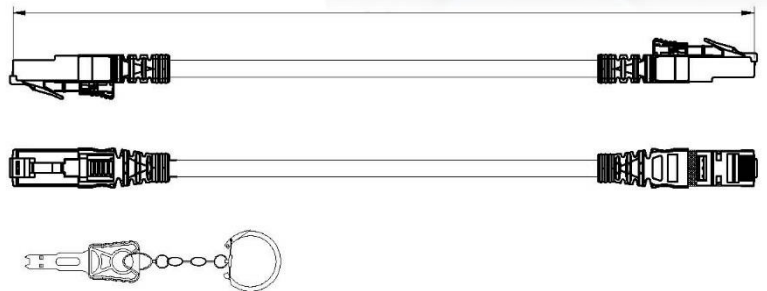

References	Length	CoLor
AD-CCLC6F-L-C	L=1, For a length of 1 m	C=G, For Grey
	L=2, For a length of 2 m	C=B, For blue
	L=3, For a length of 3 m	C=R, For Red
	L=5, For a length of 5 m	C=V, For Green
	L=7, For a length of 7 m	C=J, For yellow
	L=N, For Black	C=N, For Black