


AD-PBRC6U-24 Cat.6 24P Punch down UTP 180° Patch Panel (Auto press-fit)

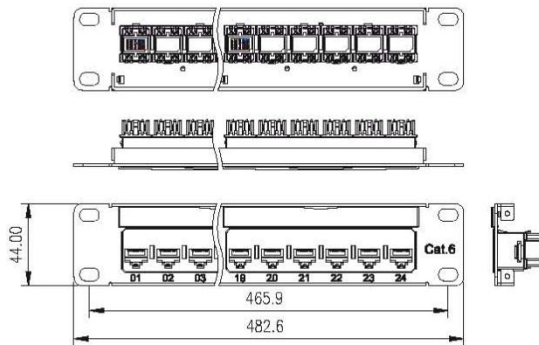

Specification:

Qualified Unscreened Class E / Cat.6 Permanent Link & Channel
ANSI/TIA-568-C.2
IEC60603-7-2 2nd Edition
ISO/IEC11801 2.2 Edition
CENELEC EN 50173-1:2011

Electrical:

Current Rating: 1.5 Amps
Insulation resistance: 500 Mohms minimum
Contact resistance: 20 mohms maximum
DC resistance: 0.1 ohms maximum

Mechanical:

Plug insertion life: 750 Cycles minimum
Plug & Jack contact force: 100 Grams minimum
Using FCC-Approved Plug
Plug retention force: 30 lbs minimum
Temperature: -40°F to 150°F (-20°C to 68°C)

Physicals:

Frame : 1.2t SPCC, Coating print
Plastic: High impact flame retardant plastic
PCB: FR4, 1.6mm thickness
Jack Contact: Gold plating over nickel on copper wire
Connector: Insulation displacement connector
(IDC) Accept #22-26 AWG solid wire

