


AD-NVR616R-64 / 128-4KS2

64/128 Channel Ultra 4K H.265 Network Video Recorder



Features

- > Intel Processor
- > Max 64/128 IP Camera Inputs
- > Max 384Mbps Incoming Bandwidth
- > Up to 12MP Resolution for Preview and Playback
- > Supports RAID 0/1/5/6/10
- > iSCSI and Mini SAS for Expanded Storage Space
- > Smart Tracking and Intelligent Video
- > Redundant Power

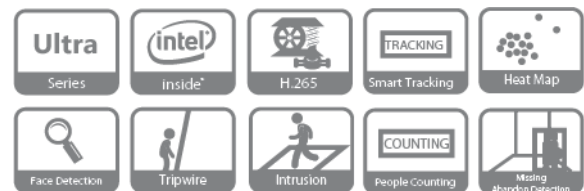

AD-NVR616R-64 / 128-4KS2

Technical Specifications

System	
Main Processor	Intel Quad-core Processor
Operating System	Embedded LINUX
Audio and Video	
IP Camera Input	64/128 Channel
Two-way Talk	1 Channel Input, 1 Channel Output, RCA
Display	
Interface	2 HDMI (up to 3840 x 2160 , Different Source), 1 VGA 4 HDMI (Optional)
Resolution	3840 × 2160 , 1920 × 1080 , 1280 × 1024, 1280 × 720 , 1024 × 768
Multi-screen Display	1st Screen: 1/4/8/9/16/25/36 2nd Screen: 1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording	
Compression	H.265/H.264/MJPEG
Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 1.3MP, 720P etc.
Record Rate	384Mbps
Bit Rate	16Kbps ~ 20Mbps Per Channel
Record Mode	Manual, Schedule (Regular, MD (Motion Detection), Alarm, IVS), Holiday, Stop
Record Interval	1 ~ 120 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec
Video Detection and Alarm	
Trigger Events	Recording, PTZ, Tour, Alarm Out, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss and Tampering
Alarm input	16 Channel, Low Level Effective, Green Terminal Interface
Relay Output	8 Channel, NO/NC Programmable, Green Terminal Interface
Tracking Trigger Event	Zoom, Tracking, Recording, Preset, Snapshot, Alarm, etc.

AD-NVR616R-64 / 128-4KS2

Playback and Backup	
Playback	128 Mbps in Raid 5 Mode; 64 Mbps in single HDD Mode
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network/eSATA Device
Third-party Support	
Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
Network	
Interface	4 RJ-45 Ports (10/100/1000Mbps)
Ethernet Port	4 Ethernet Ports Joint Working or 4 Independent 1000Mbps Ethernet Ports
PoE	N/A
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search (Support Dahua IP camera, DVR, NVS, etc.)
Optical Fiber Interface	2 Giga Optical Fiber Interface
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 2.4, CGI Conformant
Storage	
Internal HDD	16 SATA III Ports, Up to 6 TB capacity for each HDD
HDD Mode	Single, Raid 0/1/5/6/10 (Enterprise-level HDDs are recommended), Support Global HDD Hot-spare
eSATA	1 eSATA Port (Please contact technical engineer to confirm the compatible device)
SAS	1 Mini SAS Port, for Storage Expansion

AD-NVR616R-64 / 128-4KS2

Auxiliary Interface	
Front Cover	Support Hot-swap
USB	4 USB Ports (2 USB 2.0 , 2 USB 3.0)
RS232	1 Port, for PC Communication and Keyboard
RS485	1 Port, for PTZ Control
Electrical	
Power Supply	AC100V ~ 240V, 50 ~ 60 Hz, Redundant
Power Consumption	<51W (Without HDD)
Environmental	
Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 86 ~ 106kpa
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F), 0 ~ 90% RH
Construction	
Dimensions	3U, 485mm x 512.9mm x 133.2mm (19.1" x 20.2" x 5.2")
Net Weight	19.1kg (42.1 lb) (without HDD)
Gross Weight	28.5kg (62.8 lb)
Installation	Rack-mounted
Certifications	
CE	EN55022, EN55024, EN50130-4, EN60950-1
FCC	Part 15 Subpart B, ANSI C63.4-2014

AD-NVR616R-64 / 128-4KS2

Dimensions

